


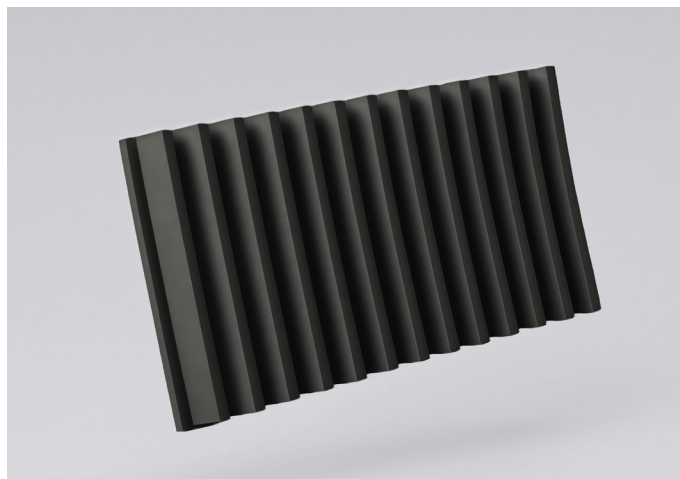

ANTI-ABRASIVE RUBBER SAWTOOTH PROFILES

Produced by vulcanizing **anti-abrasive rubber** with a toothed profile onto **steel plates**.

Used for handling materials in harsh environments where high wear resistance is required (hoppers, chutes, silos, bins) and where impact from falling materials occurs.

Advantages:

- Increased durability of coated parts
- Quick installation
- Anti-caking
- Noise reduction

Standard size: 500x1000 mm – thickness 3+57 mm.

RUBBER THICKNESS (G)	STEEL PLATE THICKNESS	SIZE
57	3	500X1000

PROPERTIES OF ABRASION-RESISTANT RUBBER	M.U.	REQUIREMENTS	TEST METHODOLOGY UNI
Hardness	Shore	63 ± 3	868:2005
Density	g/cm³	1,16 ± 0,02	1183:2005
Elongation	%	≥ 450	6065:2001
Tensile strength	kg/cm²	≥ 165	6065:2001
Modulus 300%	kg/cm²	≥ 90	6065:2001
Tear resistance	kg/cm²	≥ 70	4914:1987
Abrasion resistance	mm³	≤ 100	9185:1988

